



2. Pull the strap to release the seat bottom. Pivot the seat bottom forward.

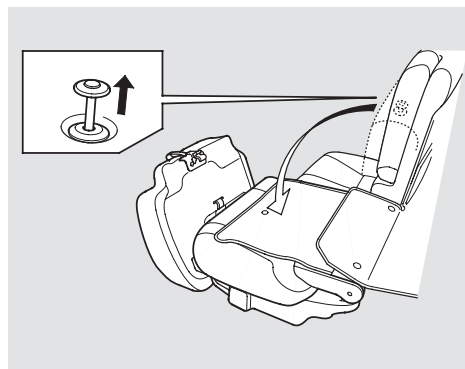

3. Remove the head restraint and pull up on the knob on the top of the seat-back. Pivot the seat-back forward.

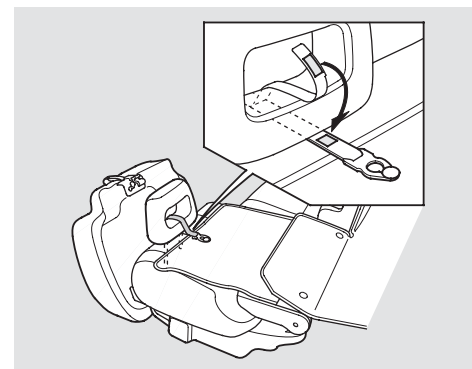

Put the head restraint behind the seat bottom as shown. Pass the fastening strap through the hole of the head restraint and fasten it with the velcro strap.

Reverse this procedure to return the seat to the upright position. Make sure that the seat is locked securely before driving.

*CONTINUED*