


Changing a Flat Tire

⚠ WARNING

Loose items can fly around the interior in a crash and could seriously injure the occupants.

Store the wheel, jack and tools securely before driving.


*Soft type spare tire cover
LX and EX models*

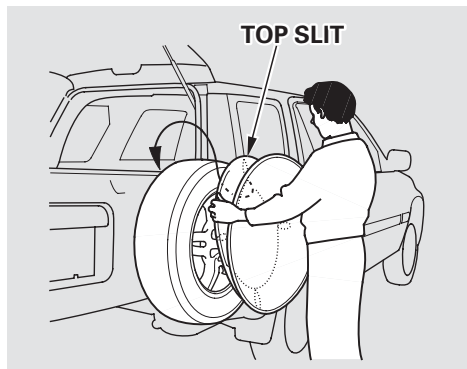

26. Hold the cover at the 10 o'clock and 2 o'clock positions, then place the top of it over the spare tire, making sure the top slit on the back of the cover is vertical.

NOTICE

Make sure the cover is at room temperature before you install it. If it's too cold, it won't fit easily over the tire.

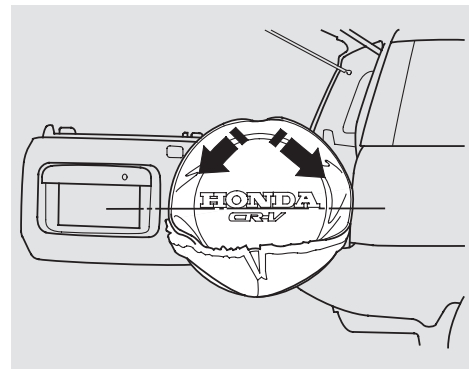

27. Step back to check the alignment of the logo. If needed, move the cover left or right until the logo is straight.